


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : F41H 3/02	A1	(11) International Publication Number: WO 94/24510 (43) International Publication Date: 27 October 1994 (27.10.94)
(21) International Application Number: PCT/SE94/00325 (22) International Filing Date: 13 April 1994 (13.04.94) (30) Priority Data: 9301235-9 15 April 1993 (15.04.93) SE (71) Applicant (for all designated States except US): BARRACUDA TECHNOLOGIES AB [SE/SE]; Box 201, S-312 22 Laholm (SE). (72) Inventors; and (75) Inventors/Applicants (for US only): ENG, Kjell [SE/SE]; Box 83, S-565 22 Mullsjö (SE). WALLIN, Erik [SE/SE]; Ugglevägen 6, S-594 00 Gamleby (SE). (74) Agents: LAGMAN, Sven et al.; H. Albiñs Patentbyrå AB, P.O. Box 3137, S-103 62 Stockholm (SE).		(81) Designated States: AU, CA, FI, JP, NO, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> <i>In English translation (filed in Swedish).</i> xx 5
(54) Title: WARP-KNITTED CAMOUFLAGE MATERIAL (57) Abstract <p>A camouflage material having radar screening properties is comprised of a warp-knitted fabric, so-called Raschel fabric, which includes yarn (2) into which metal fibres have been spun. The yarn is laid with a lay-out technique such that the sum of the extensions of the yarn will be generally the same in each direction in the plane of the fabric. The fabric is suitably stabilized with a sheet (1) that lacks metal fibres, which may either be a yarn layer in the warp-knitted fabric or a through-knitted fabric, preferably a nonwoven fabric coated with a reflective metal layer.</p> 		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LU	Luxembourg	SN	Senegal
CN	China	LV	Latvia	TD	Chad
CS	Czechoslovakia	MC	Monaco	TG	Togo
CZ	Czech Republic	MD	Republic of Moldova	TJ	Tajikistan
DE	Germany	MG	Madagascar	TT	Trinidad and Tobago
DK	Denmark	ML	Mali	UA	Ukraine
ES	Spain	MN	Mongolia	US	United States of America
FI	Finland			UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

WARP-KNITTED CAMOUFLAGE MATERIAL

5 The present invention relates to camouflage material having a radar screening effect and comprising warp-knitted fabric in which at least part of the yarn in the fabric contains metal fibres.

10 US-A-3,733,606 discloses camouflage means which function against radar reconnaissance, and also discloses a suitable surface resistivity in this regard. It is also known in this context to sometimes include metal wires or filaments textile yarns, such as cut pieces of thin metal wire or filament which are spun together with other fibres, either natural or synthetic fibres, to form a yarn which is later
15 used as the warp and weft yarn in weaving processes. A good camouflaging effect is achieved when the surface resistance is suitably balanced, a practical standard in this regard being 300 Ohms per square. In certain cases, however, a lighter and more airy fabric is desired, which cannot be
20 achieved by weaving, therewith leaving the alternative choice of knitted fabrics. The alternative possibility of weaving a wider mesh is not a suitable alternative, since the yarns will slip and slide unless glued together. Furthermore, a woven fabric cannot be draped as well as or
25 will not fall as well as a knitted fabric.

30 US-A-4,064,305 discloses knitted camouflage material. This material, however, has been devised with the intention of improving the wear properties and the stability properties of the material in relation to woven fabrics with regard to the radar defeating properties of the material when the material is in folds or is creased. According to this patent specification, the usable radar properties are
35 achieved by a stretching process followed by fixation to a supportive sheet.

An object of the present invention is to provide a light-weight knitted fabric which can be used for camouflaging purposes, either as it is or when leaf-cut in the manner disclosed in the first-mentioned U.S. patent specification.

5 Another object of the invention is to provide a warp-knitted fabric which exhibits from the beginning uniform radar reflexion and transmission respectively, as far as the polarization direction is concerned.

10 According to one particular aspect of the invention, an object is to provide a ready knitted fabric which exhibits good radar properties and which is effective in the infrared range, by "knitting together" or union knitting with a sheet or layer that reflects in the infrared range.

15 These objects of the invention and advantages afforded thereby are achieved in that in a camouflage material of the kind defined in the introduction the metal yarn containing the metal fibres is inlaid with a lay-out technique such that the sum of the extensions of the yarn
20 will be essentially the same in each direction in the plane of the textile.

Expressed schematically, this means that it shall be
25 endeavoured to produce relatively long float stitches with the yarn containing the metal fibres. It should also be endeavoured to obtain a knitted structure which gives low elasticity.

30 Yarn in which conductive material has been spun is relatively expensive to produce, and it is therefore suitable to lay this yarn in a fabric of some other kind, using conventional yarn as a carrier, or optionally, according to one variant, to knit-in a layer, which may be a gauze layer
35 (nonwoven) provided with a metal layer, for instance a vapour deposited aluminium layer. This will also result in a less elastic fabric.

In order to obtain a visual camouflaging effect, it is suitable to colour the knitted material in patches. This can be achieved advantageously by pattern spraying with a dispersion water-based paint, which when drying and heated to a temperature of, e.g., 180°C for 30-40 seconds, will form a chemical bond with the fibre.

If the material is to be included in a net, it is suitable to leaf-cut in the manner described in US-A-3,069,796, and fasten the material to a supportive net structure in a known manner. A quilting technique is preferred in this regard.

The invention will now be described with reference to exemplifying embodiments thereof and also with reference to the accompanying drawings.

Figure 1A is a schematic view of an inventive fabric, whereas Figure 1B is an enlarged photocopy of the actual fabric taken on a conventional office copying machine. Figure 2 illustrates another fabric constructed in accordance with the invention. Figure 3 illustrates a knitted fabric of an earlier known kind. Figures 4A and 4B illustrate radar transmission and radar reflexion respectively with different polarization directions for the fabric shown in Figures 1A and 1B. Figure 5A and Figure 5B illustrate corresponding transmission and reflexion respectively for the known fabric shown in Figure 3.

Example 1

The fabric illustrated in Figures 1A and 1B is a warp-knitted fabric which can be produced on a Raschel knitting machine having two or three bars. The machine used in the present case had twenty-two needles per inch. Three yarn systems were included:

- I. One yarn system of non-reflecting yarn in 50 detex polyester with a yarn lay-out pattern of: 10/34 and all yarn guides threaded (the rear bar);
- 5 II. One yarn system with radar reflecting yarn in Nm 68/1 (polyester with a 5% steel admixture), with a yarn lay-out pattern of 10/12/23/12/ and each alternate yarn guide threaded (centre bar); and
- 10 III. One yarn system with the same yarn as in II., but with each alternate (intermediate) yarn guide threaded and with a yarn lay-out pattern of 23/21/10/12.

The steel fibre admixture comprised 8 μ m drawn steel fibre chopped into lengths of 5-6 cm.

- 15 The yarn, or thread, system I. is shown as a dotted structure schematically in Figure 1A, whereas the yarn or thread systems II. and III. are shown in heavy lines 2. Figure 1B shows essentially only the yarn systems II. and
- 20 III.

- 20 The yarn lay-out notations given above are conventional notations, meaning that any person skilled in the art of warp weaving will be able to produce the fabric on the basis of the foregoing. The yarn system I. with its long
- 25 float stitches and stabilized by the two remaining systems affords good stiffness in the width direction, while the two remaining systems give rise to good stiffness in the longitudinal direction/warp direction.

- 30 A sample of this fabric was examined with regard to radar reflexion and radar transmission with two polarization directions, according to Figures 4A and 4B respectively. It will be seen from Figure 4A that for 9 GHz, the variation in relation to a mean value is $\pm 8\%$, and at 10 GHz, the
- 35 values actually coincide. Neither do the reflexion values differ to any great extent, these values having been compared with a metal plate.

Example 2

The fabric illustrated in Figure 2 has similar radar properties to the fabric illustrated in Figure 1, and the base fabric has been replaced with a finished polyethylene nonwoven material (Tyvek (TM) 80 g/m² and one side coated with aluminium). This nonwoven material is pierced by the needles in the warp knitting machine with each "stroke" of the needle bar.

10 In this example, a yarn Nm 80/2, polyamide/steel 5 percent by weight, was laid-out in a pattern corresponding to 00/11/22/11/, using a laying-out bar and with full needle threading. The same type of yarn was laid using another laying-out bar with a lay-out pattern of 23/21/10/12/. As one skilled in this art will understand, the first-men-

15 tioned lay-out is effected in the absence of loops and is, instead, held firmly by the second yarn system, therewith consuming a minimum amount of yarn and achieving the maximum radar effect.

20 This fabric exhibited similar radar properties to the fabric according to Example 1.

Example 3

25 The fabric illustrated in Figure 3 has two yarn systems, the first with a yarn lay-out pattern of 12/10/12/23/34. The second yarn system had a lay-out pattern of 23/34/32/12/10. Physically, the fabric was highly elastic in both directions and it was possible to stretch the fabric by almost 100%. The fabric coincides with the

30 description in US-A-4,064,305, and is actually intended to be used in a stretched state and glued between two sheets of film. All yarn includes metal fibres.

35 The radar characteristics of this fabric were tested in the same manner as the fabric in Example 1. The results are shown in Figures 5A and 5B respectively. It will be seen

immediately that the curves for the two polarization directions for the radiation used differ considerably. For instance, the deviation in reflexion at 9 GHz in relation to a mean value is roughly $\pm 40\%$. In this state, the fabric must be considered unsuitable for use as radar camouflage material. It is also difficult to achieve uniformity in a stretched state, since the stretch percentage is not taken-up uniformly across the width.

10 The fabrics according to Example 1 and Example 2 are only examples of fabrics that can be constructed in accordance with the invention. For instance, the yarn can be laid-out in an atlas pattern, for instance a lay-out pattern corresponding to $(12/23/34/32/21/10) + (32/21/10/12/23/34)$.
15 In order to obtain sufficient stability, it is preferred to use a stabilizing sheet, either as in Example 1 a base fabric which is made simultaneously and provides mutual stabilization, or as in Example 2 by union knitting while stitching through a finished fabric, this fabric normally,
20 but not necessarily, being a nonwoven fabric.

CLAIMS

1. A camouflage material having a radar screening effect, comprising a warp knitted fabric in which at least a part of the yarn contains metal fibres, characterized in that the yarn containing the metal fibres is laid with a lay-out technique such that the sum of the extensions of said yarn will be essentially the same in each direction in the plane of the fabric.
2. A material according to Claim 1, characterized in that the yarn (2) containing the metal fibres has been knitted together with a shape-stabilizing fabric layer (1).
3. A material according to Claim 2, characterized in that the shape-stabilizing fabric layer is comprised of a simultaneously produced base fabric.
4. A material according to Claim 3, characterized in that the simultaneously produced base fabric has a yarn lay-out with long float stitches.
5. A material according to Claim 4, characterized in that the long float stitches are formed by lay-outs beneath at least three needles between successive loops.
6. A material according to Claim 2, characterized in that the shape-stabilizing fabric is comprised of a sheet through-knitted with yarn containing metal fibres.
7. A material according to Claim 6, characterized in that the through-knitted sheet is coated with a light-reflecting metal layer.
8. A material according to any one of the preceding Claims, characterized in that the material is leaf-cut and is attached in an extended state to a supportive net in a quilted fashion.




FIG. 1A




FIG. 1B




FIG. 2



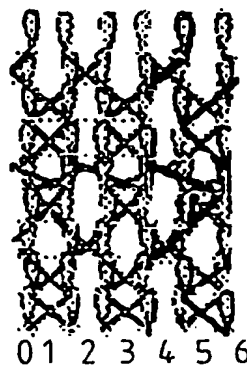


FIG. 3

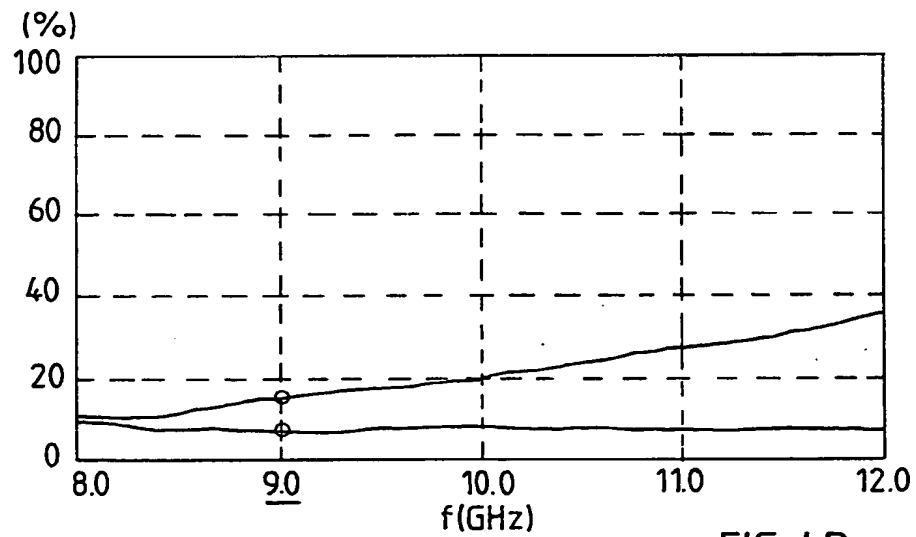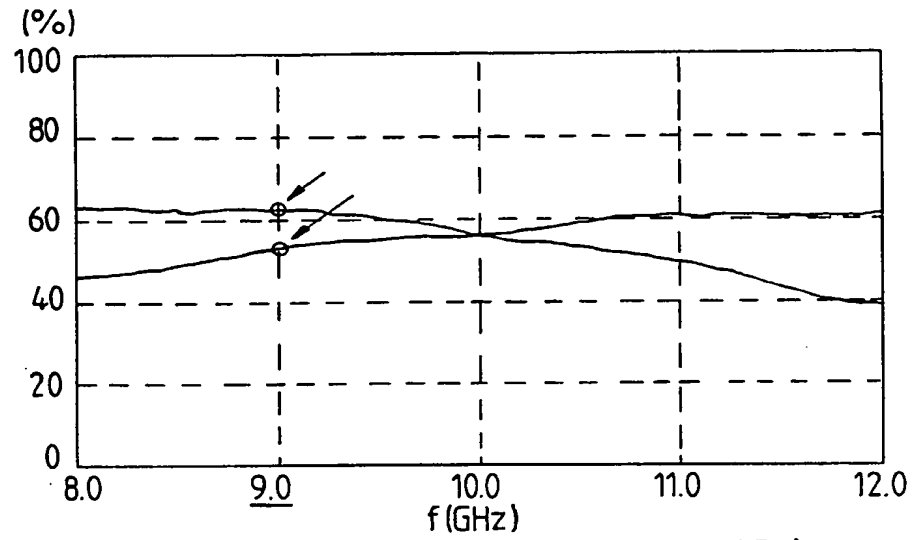

3/3

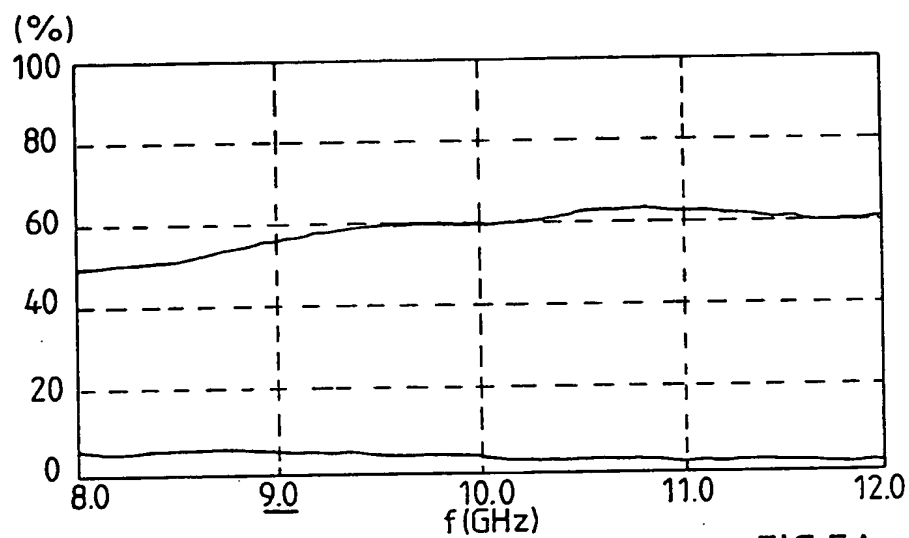


FIG. 5A

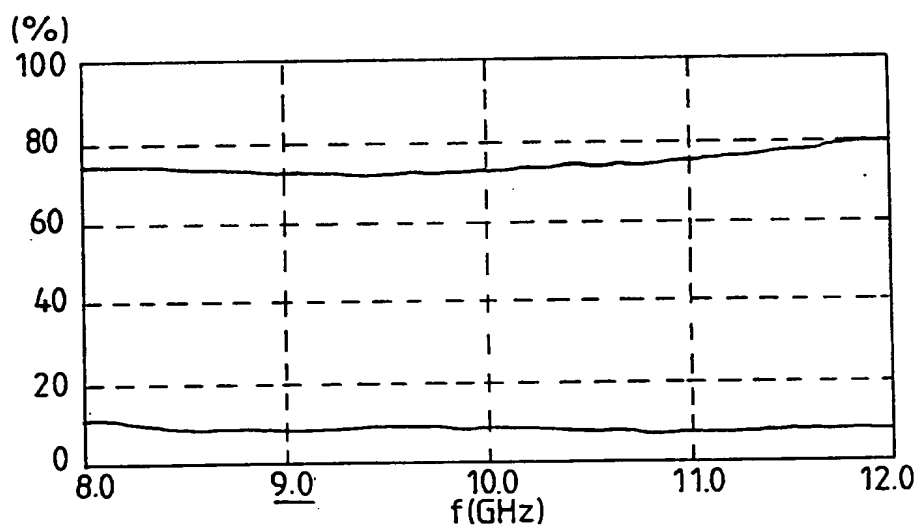


FIG. 5B

SUBSTITUTE SHEET

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE 94/00325

A. CLASSIFICATION OF SUBJECT MATTER

IPC5: F41H 3/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC5: F41H, D02G, D03D, D04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

DIALOG, ORBIT

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 4064305 (E.W. WALLIN), 20 December 1977 (20.12.77), column 3, line 9 - line 39; column 5, line 11 - line 56 --	1
A	US, A, 4671988 (J.R. DOWELL ET AL), 9 June 1987 (09.06.87), column 2, line 41 - line 55 -- -----	1

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

• Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

8 July 1994

Date of mailing of the international search report

20 -07- 1994

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Jonas Löfgren
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family members

28/05/94

International application No.
PCT/SE 94/00325

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A- 4064305	20/12/77	BE-A- 841749 CA-A- 1051213 DE-A,C- 2620093 FR-A,B- 2311117 GB-A- 1520333 JP-A- 51139962 SE-B,C- 420236 SE-A- 7602252	01/09/76 27/03/79 25/11/76 10/12/76 09/08/78 02/12/76 21/09/81 14/11/76
US-A- 4671988	09/06/87	NONE	